ACCESSORIES

ReelCaddy

The "REEL" Easy Way To Handle Wire

P/N	DESCRIPTION
RC01S	24" Single Rod Spool Caddy
RC01L	36" Single Rod Spool Caddy
RCB1	Optional Brake Kit
U1000/NH	Reusable Cable Reel

PATENT PENDING

FIBER OPTIC 3-WAY STRIPPER

CABLE STRIPPER

SHEARS FOR COPPER CABLE

WIRE CUTTER & STRIPPER

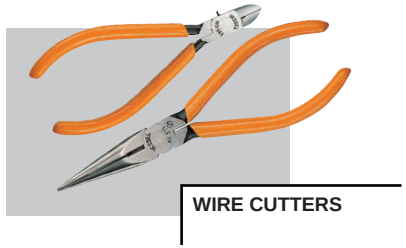

WIRE CUTTERS

HEAVEY-DUTY UTILITY KNIVES

WCT™ PRODUCTS
Since 1980

Toll-Free: 800-WCT-PROD (928-7763)
Local Phone: 310-822-5212
Fax: 310-306-9343
Email: info@wctproducts.com
Address: 13309 Beach Ave.
Marina del Rey, CA 90292
Website: www.wctproducts.com

A-15951

U1000/NH
REUSABLE CABLE REEL

MANUAL

WBENC Certified Woman Owned Small Business

INTRODUCTION

To fully appreciate the U1000/NH's features, please take a few minutes to review these instructions and familiarize yourself with the procedures for operating this tool.

CAUTION:

- Retain these instructions for future use.
- Always inspect and protect your worksite prior to use and observe all safety rules and regulations.
- Do not use or store the U1000/NH near intense heat sources, such as radiators, furnaces, etc.

ASSEMBLING THE U1000/NH

* The U1000/NH should already come assembled. If not, please follow the steps below.

1. Screw one of the flanges onto one side of the hub with the black key facing away from the hub. Be sure to pull the black key toward you as you begin twisting the flange into place clockwise.

2. Attach the second flange to the other side of the hub with the black key facing away from the hub. Again, be sure to pull the black key toward you as you begin twisting the flange into place clockwise.

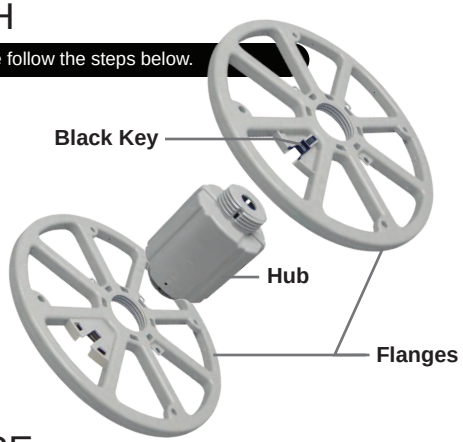

HOW TO LOAD COIL OF WIRE

1. (Figure 1) Place assembled U1000/NH on a flat surface and remove the top flange from the hub by twisting it in a counter-clockwise rotation. Be sure to pull the black key toward you as you begin twisting the flange.

2. (Figure 2) Slide a coil of wire over the hub.

3. (Figure 3) To complete the assembly, re-attach the top flange (with the black key facing toward you) and twist the flange into place onto the hub clockwise.

Figure 1


Figure 2

Figure 3

NOTE:

Capacity indicators are imprinted on the flanges to aid in estimating the amount of wire on a reel at all times. The printed numbers are percentage indicators because the houses many different types of wire. You can slip tie-wraps through the four grooves in the hub to bundle and remove wire from the hub if you determine there isn't enough wire on the reel to handle a job.

Both flanges can be adjusted out should you require a larger hub dimension. A removeable handle is included that fits into any wire keeper hole for easy rewinding of wire.

DESCRIPTION & DIMENSIONS

Description: Reusable Cable Reel, Durable Plastic (Includes Flanges and Hub)

* Wire Not Included

Total Weight: 9.5 lbs.

Capacity Indicators
- Aids in Estimating Wire Footage on Reel
- Numbers Are Percentage (%) Indicators Since Reel Houses Many Different Types of Wire

Flanges
- Durable Plastic Material
- Adjustable for Different Reel Sizes (Min 6.57" to Max 6.97")
- Weather-Proof
- 19" Diameter

Hub
- Durable Plastic Material
- Works With Wire Coils
- Weather-Proof
- 6" Diameter

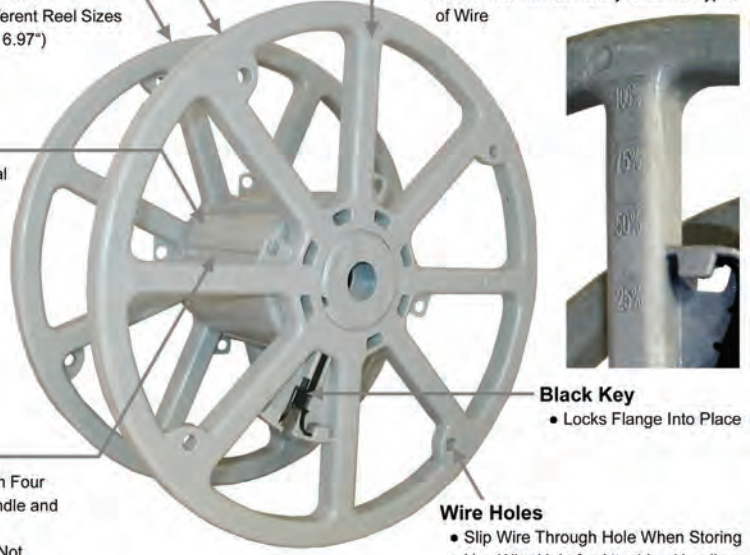

Black Key
- Locks Flange Into Place

Hub Grooves
- Slip Tie-Wraps Through Four Grooves In Hub To Bundle and Remove Wire
- Perfect When There's Not Enough Wire on Reel for the Job

Wire Holes
- Slip Wire Through Hole When Storing
- Use Wire Hole for Attaching Handles A-13836 & A-13700

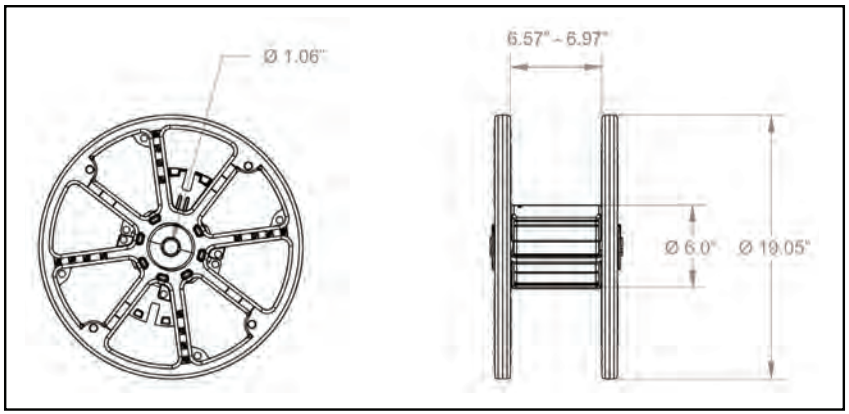

OPTIONAL HANDLES:

Snap-In Handle

A-13836

Bolt-On Handle

A-13700